


VIEW B-B




DETAIL E
FULL SITE

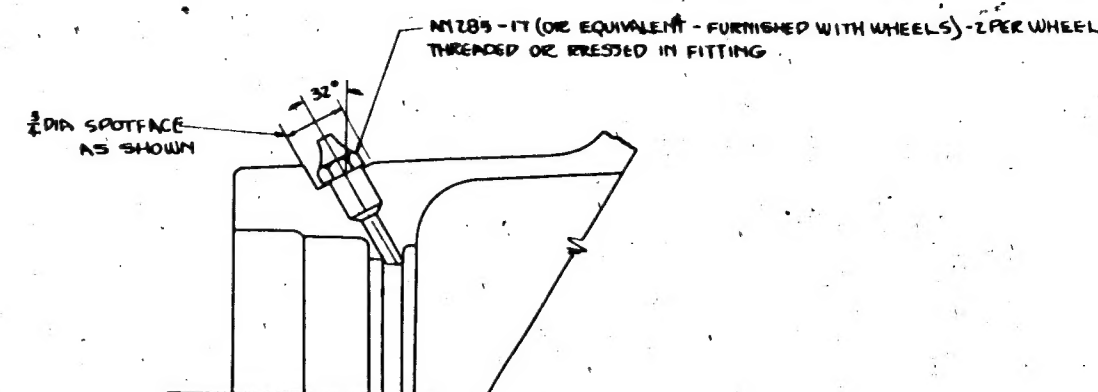


VIEW D-D
QUARTER SIZE

NOTE:
RELATION OF STRET OFFSET
TO CASTING AS SHOWN



- (7) 1100 X 12 6 PLY SMOOTH BF. GOODRICH LOW
PRESSURE TIRE, OR EQUIVALENT (M)
- (8) 11 X 12 BF. GOODRICH TUBE, OR EQUIVALENT;
WITH SPECIAL SCHRADER VALVE OR
EQUIVALENT (WITH LEAD WASHER) FOR
WATER FILLING
- NOTE:
(9) USE (H) TUBE (RUBBER VALVE, STEM, SCHRADER
FOR ALL FUTURE SHIPS & SPARES

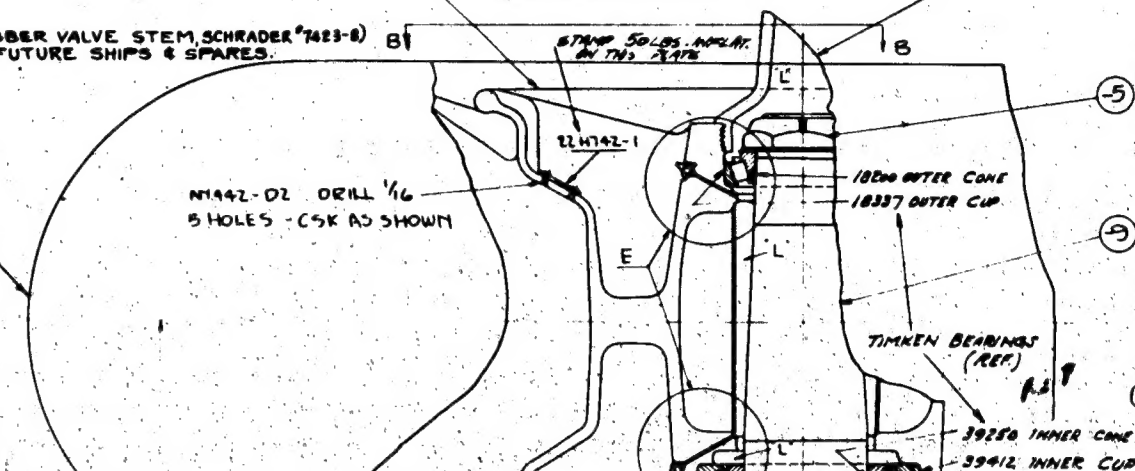




- ③ CAPSTEP - OUTER WHEEL ONLY (BENDIX # 50198)
TO BE FURNISHED WITH WHEELS.

- AC 32A510 - 2 NUT
 -5 AC 32A509 - 2 TAB WASH.
 AN380-5B - 10 COTTER
 TO BE FURNISHED WITH WHEELS


- (2) NUT TO CONFORM WITH A.C. SPEC. *2825B
COLLAR & PLUG AS ON BENDIX DWG *25993
(2) TWO SEALING WASHERS
FELT RING
LOCKING RING
TO BE FURNISHED WITH WHEELS
(COLLAR SEALWASHER & LOCKING TO B)
STAINLESS STEEL OR EQUIVALENT)




4. WILLIAM KT 34 BRG - THE WILLIAM CO
360 FURMAN ST. BROOKLYN NY.
OR EQUIVALENT, FOR SIZE AND LOAD CAP
THE (2) TWO BEARING RACES SHOULD BE CADMIUM
PLATED (PLATING TO BE DONE, EITHER BY VENDOR
OR BY CONSOLIDATED AIRCRAFT CORP.)

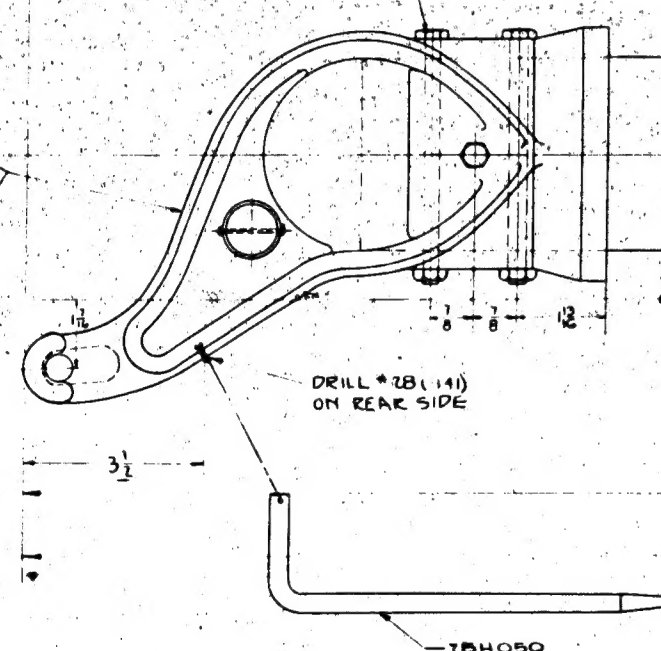


DRILL #28 (14)
ON REAR SIDE

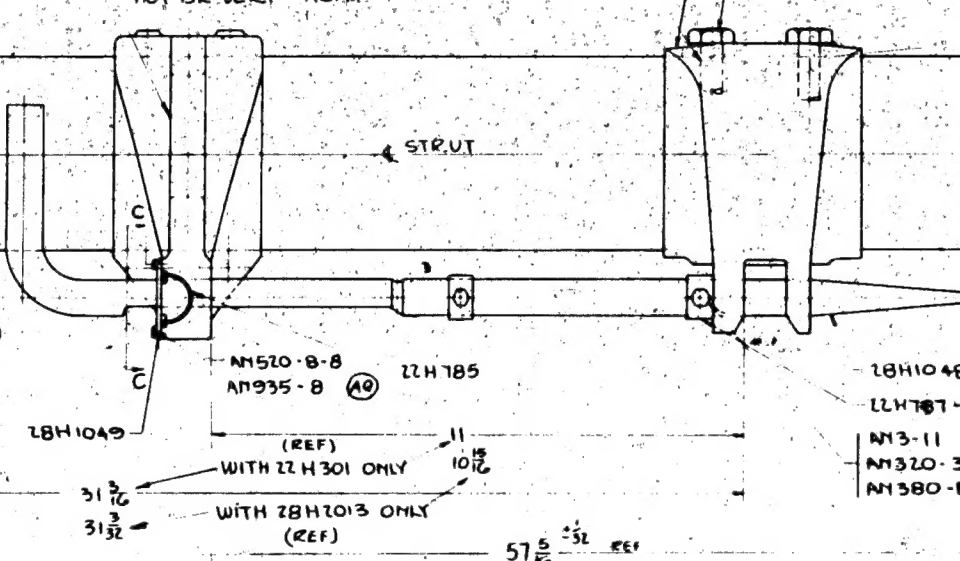


- 2841048 - 2 REQ'D
- 224787 - 2 REQ'D.
M13-11
M1320-3
M1380-82-7

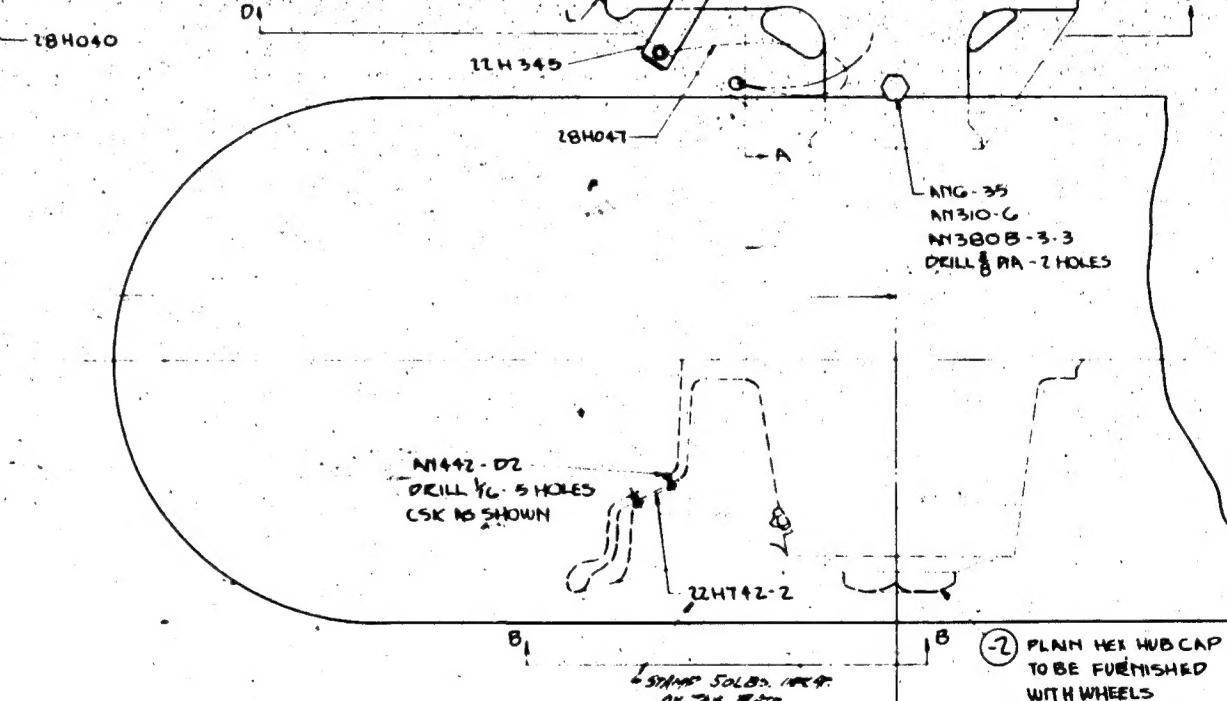

- | | | | | | |
|------|-----------|---|---|---|---|
| BCAP | 28H3005-4 | 2 | 2 | 2 | 2 |
| WED | 28H3005-5 | 2 | 2 | 2 | 2 |
| | 28H005-11 | | | | |
| | 134362 | - | - | - | - |

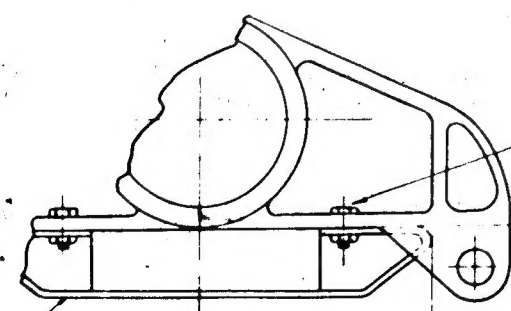


DETAIL G FOR PBY-1 & IPBY-1 ONLY

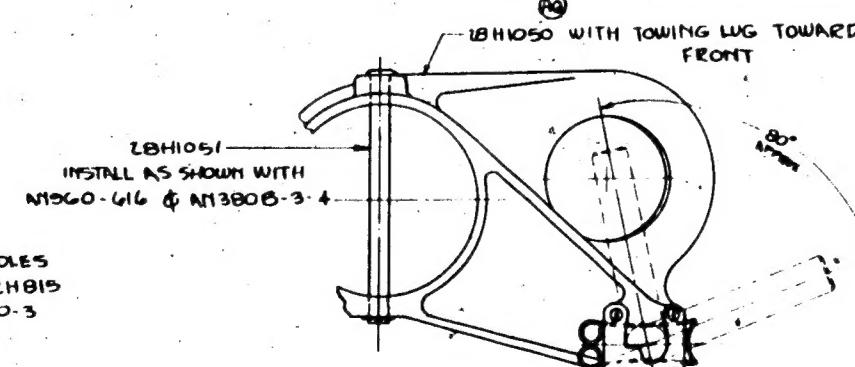

VIEW C-C

2841049 SHALL BE INSTALLED
TO ALLOW LOCK PIN GRIP THE
AM'T OF ROTATION SHOWN

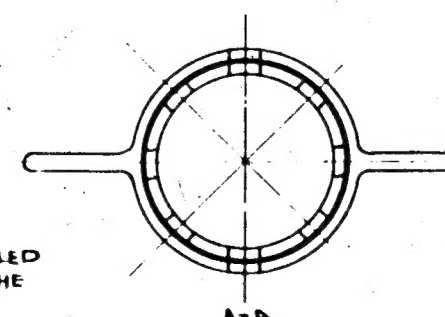

A-B

~ LUBRICATION NOTE ~

AT ASSY & SERVICE OVERHALL FILL ALL SPACES MARKED "L" WITH LUBRICANT "10-10-10" GEAR OIL OR EQUIVALENT CHEM. OIL. DO NOT USE AT LEAST ONE EQUIVALENT COORDINATE PREVENT PROPORT OF HEAVY GREASE CONSISTENTLY. AFTER ASSY PRESS IN MORE LUBRICANT (7 PLACES) WITH GUN, FILLING ALL POCKETS TO EXCLUDE THE ACCUMULATION OF WATER. USE OF ONE OR TWO NEMITE LUBRICATORS OPTIONAL.

ANISH NOTES

PAINT -3 CAP STEP RED
PIN & BAR HANDLES TO BE PAINTED
PIN ENDS TO BE FREE OF PAINT
LUBRICANT POINTS YELLOW.
PAINT LARGE BLACK LETTERS
LH AS SHOWN
PAINT RH ON 284006-1

[illegible][illegible]